

SUPPORTS UPC COMPONENTS:




- CONNECTORS
- BARE FERRULES
- MIL-SPEC TERMINI / CONTACTS

INDEPENDENT SUSPENSION

OPTICALLY ALIGNED FIXTURE

TELCORDIA COMPLIANT

IN-LINE VIDEO INSPECTION

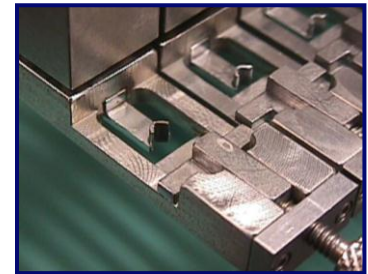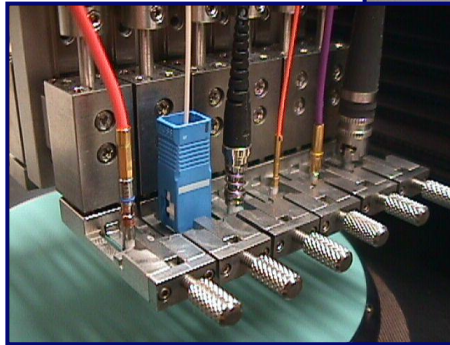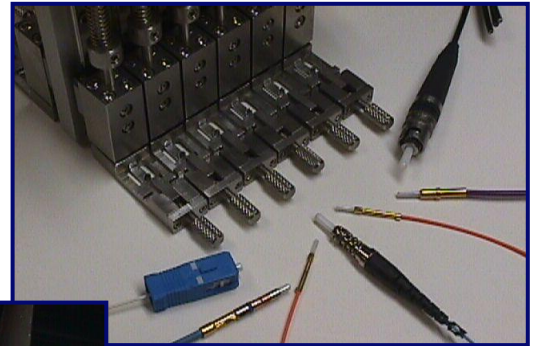

SPECIFICATIONS AND FEATURES

Polisher Compatibility

Scepter™
SpecPro™
Rev™
Proton™

Capacity (polisher dependent)

Up to 12 components

Component Engagement

Precision v-groove mechanism

Ferrule Diameter Support

Standard 1.25mm to 3.2mm Connector Capacity
Modified fixtures available for smaller diameters

UPC Component Support






Connectors

SC, FC, ST, LC, MU, E2000, F3000, SMA, ferrules,
bare fiber adapters

Mil-spec Termini

M29504 (1.25, 1.6, 2mm), TFOCA, ARINC 801

EXAMPLES

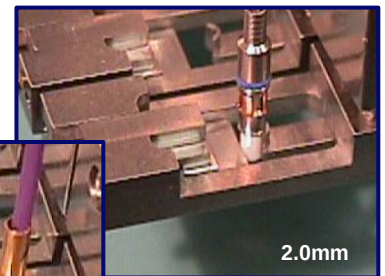

Rev.3, 7/11