

KROHNE

► achieve more

The Allure of Water.

Intelligent solutions for the water and wastewater industry.



The Allure of Water – a KROHNE World.

From space, our earth is a blue planet with seemingly vast water resources. However, only 1.5 % of this water is usable fresh water. At the same time, the increase in global population and rapid industrialization put enormous demands on the natural water resources.

Against this backdrop, it is clear how important it is to man and industry to have an efficient, high-capacity potable water supply and to have eco-friendly wastewater treatment for the planet as well as for the development of entire regions.

At the same time, the increasing competition in the field of supplying potable water forces the operators to not only consistently pursue the topics of process certainty and availability, but also to examine the topic of efficiency more closely than in the past.

As the worldwide leader in process measuring technology, KROHNE's contribution is considerable. Our product line covers the entire range of measuring and analyzing technology, from individual measuring stations to complete system solutions. In addition to the complete range of products for measuring level and flow, we also offer analyzing products for ph value, conductivity, ion concentration, redox and pressure. Servicing and calibration services round out the portfolio.

In 1961, KROHNE introduced the first electro-magnetic flow meter (EMF) for water, wastewater, additives and sludge. Since then, we have been able to win over those in the water management community time and again with the advantages of our innovations. Today, we produce more than 60,000 electro-magnetic flow meters annually in our plants in the Netherlands, Brazil, India and China.

Water is the most important future market worldwide. For this future market, we develop and produce meters that always set the example for the competition.

KROHNE – 85 years of experience and know-how in the water and wastewater industry.

1921

Company founded as LUDWIG KROHNE & SOHN in Duisburg; production of variable-area flow meters for measuring the flow of air, gases and liquids

1955

The beginning of manufacturing mechanical level indicators for measuring liquids in tanks and containers

1961

The first electro-magnetic flow meter (EMF) for water, wastewater, sludge, etc.

1972

The first EMF with pulsed direct current field excitation/automatic zero point offset for the water and wastewater industry

1978

The first ultrasonic flowmeter for water, district heating, etc.

1979

The first non-analog, but frequency-based electronics for EMFs for improved flow measurement of wastewater and sludge

1981

The first EMF measuring tube made of Al2O3 and sintered platinum electrodes for measuring the flow of iron-chloride, etc.

1983

The first microprocessor-based electronics for cost-optimized manufacturing of EMFs for the water and wastewater industry

1986

The first EMF with capacitative pickup and without contacting the measuring electrodes with the medium for measuring such things as aliphatic sludges

1990

The first radar level meter (FMCW – micro-waves) for process tanks and digestion towers

1994

The first straight tube Coriolis device for determining mass flow rate and density of polymers, methanol, activated carbon, sludge, etc.

1996

The first electro-magnetic flowmeter with integrated capacitive level measurement for partially filled tubes

2000

Construction of the third and world's largest and most accurate certified volumetric calibration system with an uncertainty of under 0,013 % relative to the total volume of the calibration tower, with a height of 43 m, suitable for wet calibration of sensors to DN 3000

2004

The first electro-magnetic flowmeter with automatic diagnostics/monitoring of the installation, of the operating status and of the medium, as well as meeting the requirements for the custody transfer applications (OIML R 49)

2005

A new clamp-on flowmeter for temporarily or continuously measuring the flow of existing water/wastewater pipelines or for checking the pumps, outputs, etc.

2006

First large electro-magnetic water meter with battery power for an operating time of more than six years with a cycle time of 1/5 Hz, MID-001-approved



Waterworks





The Haltern waterworks.
Responsible for the Rhine, Ruhr and Münsterland.



The waterworks in the Westphalian town of Haltern am See is one of a total of 13 waterworks run by Gelsenwasser AG, one of the largest providers of potable water in Germany. With an annual delivery of around 105 million m³ of water, it ranks among the largest of its kind in Europe. The service area includes more than 20 communities of the northern Ruhr district and Münsterland. A total of a million people, including commerce and industry are reliably supplied with potable water and service water by the waterworks. 24 hours a day, 365 days a year.

The Haltern waterworks is situated in a hydrogeologically favorable location, which owes its advantages to the 200 m high Halterner sand. This exposed location, in combination with responsible operation of the waterworks, is the guarantee that the natural environment in the

popular local recreation area and around the waterworks and the Stever and Mühlenbach rivers is sustainably used and thereby preserved.

The supply to the Haltern waterworks is ensured by a total of three sources: firstly, via ground water abstraction in the area around the waterworks and the adjacent Haard and Hohe Mark forests. Secondly, by ground water accumulation via the Haltern and Hullern dams. During this, the surface water stored in the dams is conducted into the deep bottom layers via seepage basins. And thirdly, by transferring water from the Dortmund-Ems canal into the dams during dry periods.

The Haltern am See waterworks has a transport capacity of 577,000 m³/day and 128 million m³ per year. The size of the water abstraction area (protection zone 1) is 200 ha.

The well house: 100 % certainty. Thanks to 3x100% diagnostics.

The untreated water is abstracted in the waterworks via groundwater wells or bank filtration wells and from dams and other types of surface water.

A large number of waterworks have decided on the OPTIFLUX electro-magnetic flowmeter for monitoring the delivery rate into the well houses. And for good reason: because, compared to conventional mechanical Waltman meters, OPTIFLUX offers key advantages. There is the significantly lower pressure loss, for example, which has a positive effect on the power consumption of the pumps. Or the longer service life, due to the fact that the device does not have any mechanical parts in the measuring section, which ensures that no grains of sand or minerals can be deposited.

And another problem is almost completely eliminated by the OPTIFLUX: on the path that the untreated water takes from the lake to the waterworks in conveyor lines with up to DN 1200, heavy deposits can accumulate on the bottom of the pipes as a result of the slow rate of flow. But such deposits also accumulate inside the flowmeter – undetected by the operator. Experiences with an EMF DN 500 resulted in erroneous measurements of around 13,000 m³/h per year. At year's end, this water tore a big hole in the consolidated balance sheet.

OPTIFLUX meets this challenge impressively. Because the new generation of devices with the IFC 300 signal converter offers a 3x100% diagnostics for the installation, application and measurement value and guarantees the operator maximum certainty on all levels.

Thus, the flow profile is permanently controlled within the measuring section. To this end, the magnetic field of the OPTIFLUX is briefly switched-over. In this way, two independent measuring fields result, one in the upper part and one in the lower part of the measuring section.

Because any turbulence as a result of an insufficiently straight feed or obstacles such as manhole covers in or upstream of the sensor also cause different types of turbulence. The same applies to bottom deposits. In this case, a weak wanted signal is induced in the lower part of the sensor just as in the free or upper part. OPTIFLUX uses this difference and alerts the operator that there will be disturbances or measuring errors inside the pipe.

In addition, each OPTIFLUX is already completely parameterized at the factory – therefore, no re-adjustment is necessary when the device is installed.





The pressure filter system: The heart of water treatment.

The quality of untreated water can vary widely in nature, depending on the extraction point. Therefore around one third of the entire amount of ground filtrate in the waterworks is conducted through a total of nine pressure filter tanks filled with quartz chips for the biological filtering out of manganese.

This is where the core process of water treatment takes place. Because, in addition to flocculation, this is where the decision is made as to which suspended particles and colloids are filtered out of the untreated water and in what amounts. And this answers the question as to what quality and composition of water can ultimately be provided to the consumer.

Gelsenwasser AG and other well-known waterworks have decided to use OPTIFLUX in this key area of water treatment. In many regards, the EMF specialist for water is predestined for this task: firstly, the device stands out due to its very high measuring performance while also boasting extremely rugged construction. The steel containment is fully welded and leak-tested at the factory.

Secondly, each OPTIFLUX is thoroughly tested over a time period of 20 hours at temperatures between -20 and +60 °C. These tests ensure a quality standard, which we call "KROHNE-proved.". These tests far exceed the legal requirements and therefore provide our customers with a high degree of investment security.

With so many outstanding properties, it is no wonder that the decision to use OPTIFLUX came easily to so many waterworks.

Booster pump works with Collector well: Everything under control.



Maximum system availability is indispensable for a waterworks – whether during water abstraction, water treatment or transport.

In the Haltern waterworks, a total of 16 rotary pumps with electric drives take on the task of supplying potable water to the public supply network. The largest pumps can transport 3,500 m³ of water per hour over an elevation of 110 meters.


Do different water qualities and flocculating agents also mean different types of devices for measuring the flow? Not necessarily. Gelsenwasser AG, for example, has decided on only one device and only one technology - the OPTIFLUX. This holds true over the entire process chain of the plant.

The advantages for the operator are obvious: because OPTIFLUX covers every application with a single electronics unit. A number of potential savings for the waterworks result from this. Because the use of only one device for each flow measuring station not only creates planning and investment security, but also keeps the warehouse management streamlined.

In addition, there is the unique 3x100% diagnostics of the OPTIFLUX – whether for device diagnostics, application diagnostics or out-of-spec testing: all of these functions are already standard on the OPTIFLUX. Periodic maintenance intervals and unexpected downtimes are therefore also a thing of the past.



Flockungsanlage

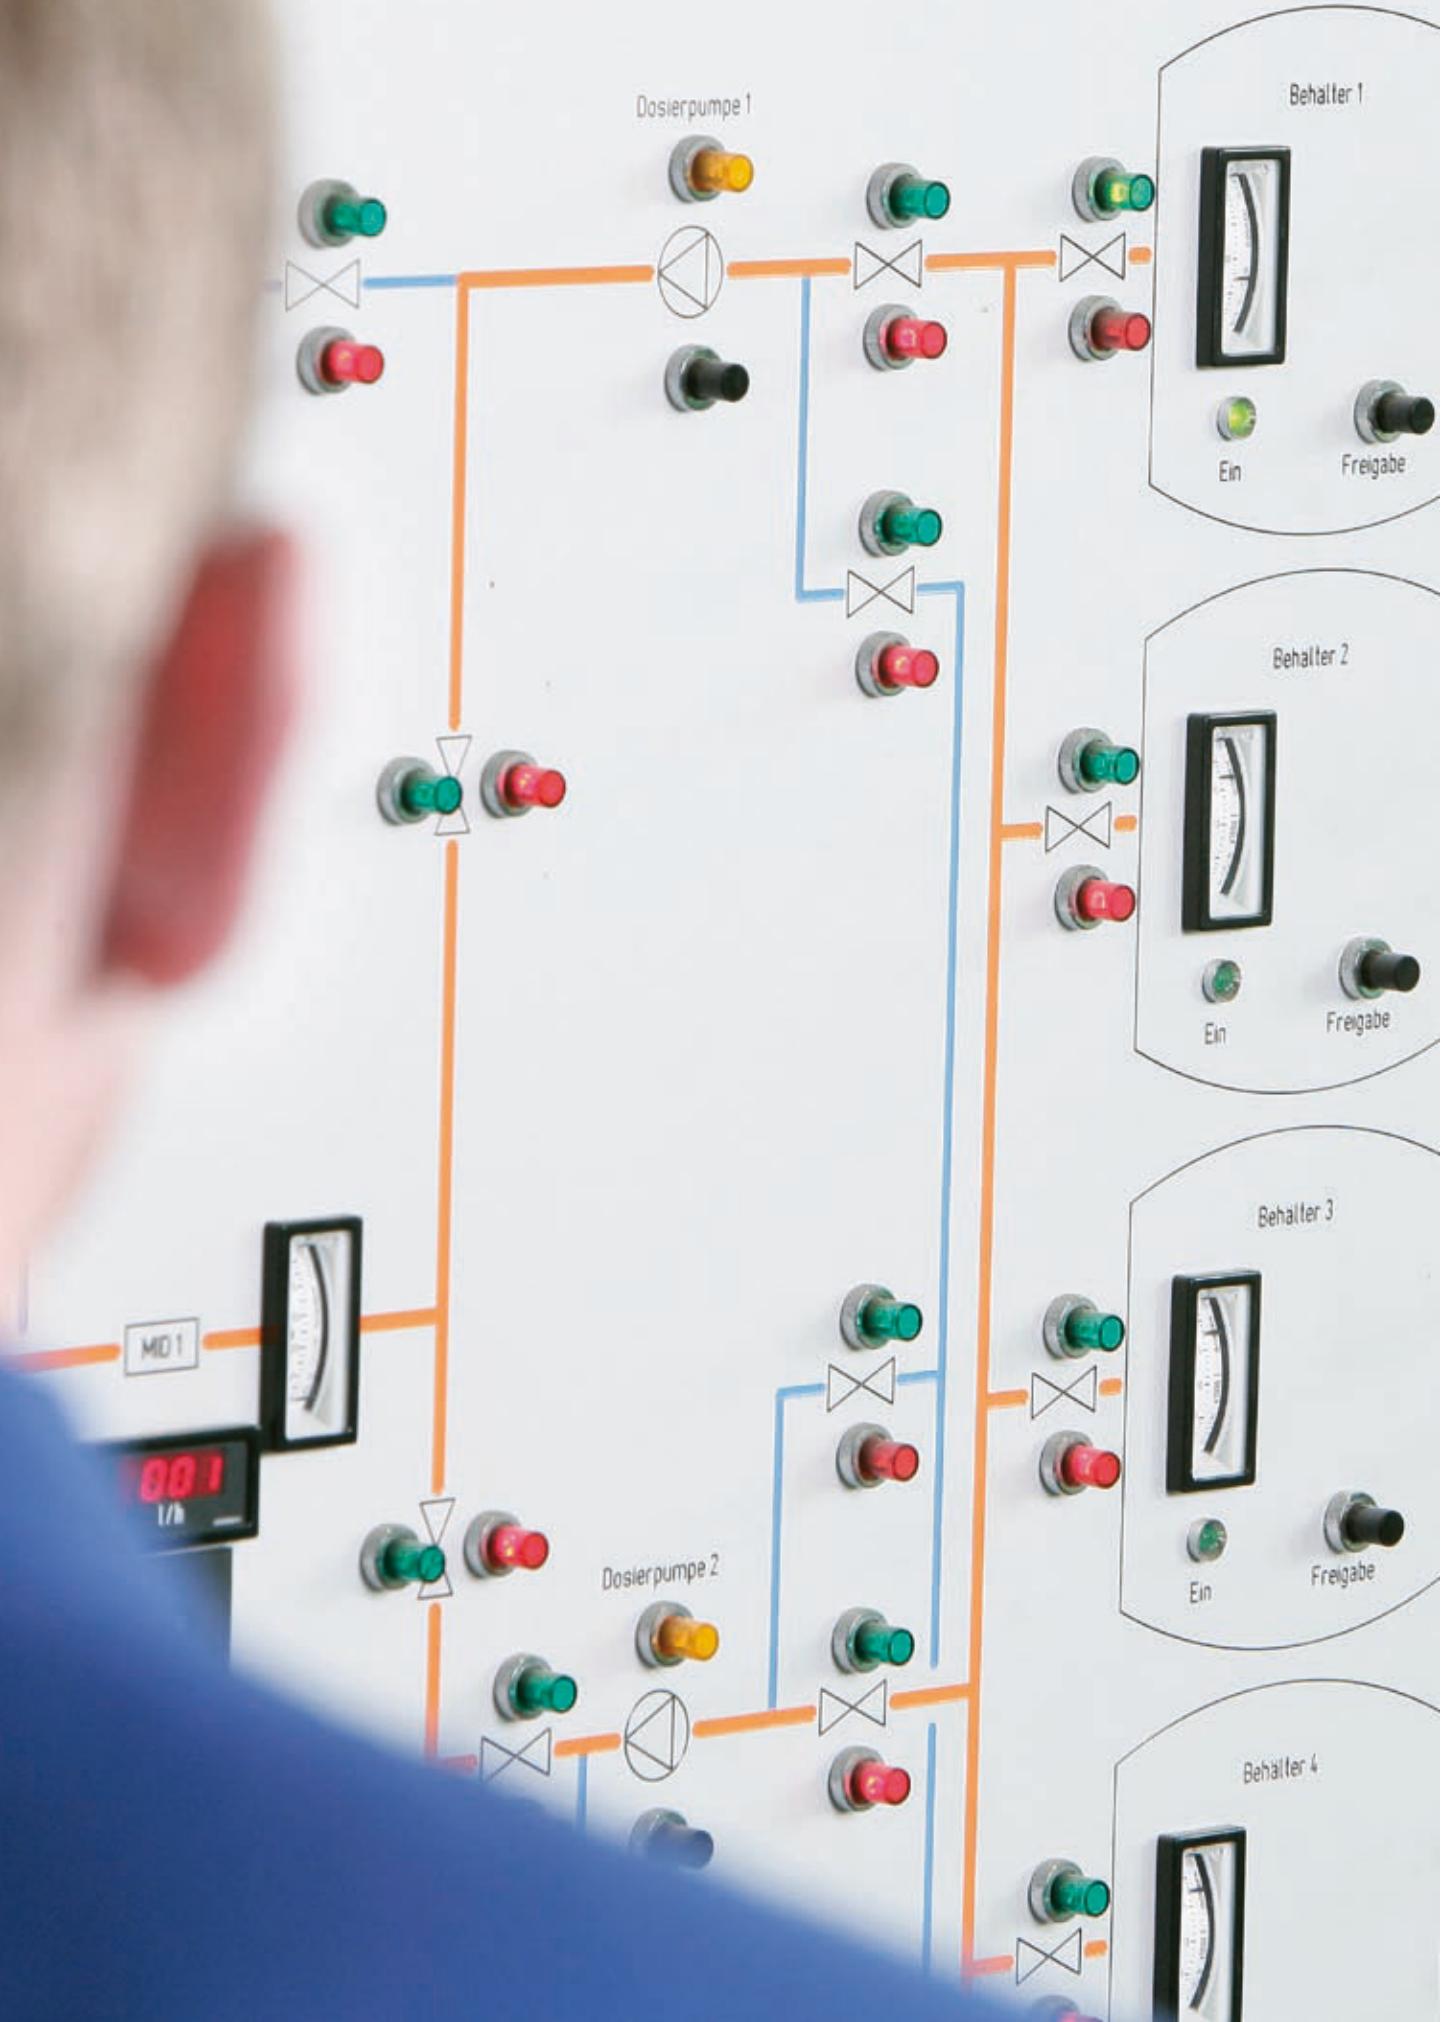

Corrosion protection and disinfection: Finding the right degree.

In waterworks, the untreated water from all of the vertical wells is consolidated in deep containers. Here, sodium base liquor for increasing the pH value and monophosphate are dosed for protecting the pipeline network and home installation from corrosion. Optionally, a chlorine bleaching system can be connected for dosing, to prevent microbiological effects.

These dosings require the use of a flowmeter, which stands out on the one hand due to its extraordinary measuring accuracy ($+/-0.15\%$) and which is also chemically durable and compatible. The solution: OPTIFLUX.

During level measurement in the deep containers, type BM 26 level indicators with bypass flap indicators from KROHNE are used. As an alternative to this, the OPTISOUND ultrasonic level meter can be used.

This measures the level in basins, containers and tanks without contact. OPTISOUND also lends itself to being used in the inlet of the system. Here, the flow in open channels can be determined indirectly via the height.

To ensure that these measurements can be made independently of influences such as fog, snow, wind or foam formation, KROHNE developed the OPTIFLEX and OPTIWAVE level meters.

The OPTIWAVE works without contact, by means of radar, no approval is required for this device. The OPTIFLEX uses guided radar and is equipped with a stainless-steel probe for guiding micro pulses.



The run-out: Clean and neat.

Flowmeters in the run-out of the waterworks and in the distribution network work in responsible positions. After all, they measure the potable water intended for the population and must precisely comply with the strict legal regulations.

This also affects the selection of the flowmeter and its materials inside the measuring pipe. Thus, only sensors that have liners that are approved as per KTW and DVGW worksheet 270 may be used in Germany. The OPTIFLUX from KROHNE meets these criteria and is the first choice for many operators due in part to this fact.

Another benefit: all OPTIFLUX meters are wet calibrated on a certified volumetric calibration station and are delivered with an official calibration certification. Regardless of whether it is a DN 2.5 or 3000 – each OPTIFLUX is also available for use in the business transfer upon request.






BRILLIANCE 2000

CE Automation Project PMS3200 11-01-2000 11-09-02




Wasserwerke Hattingen

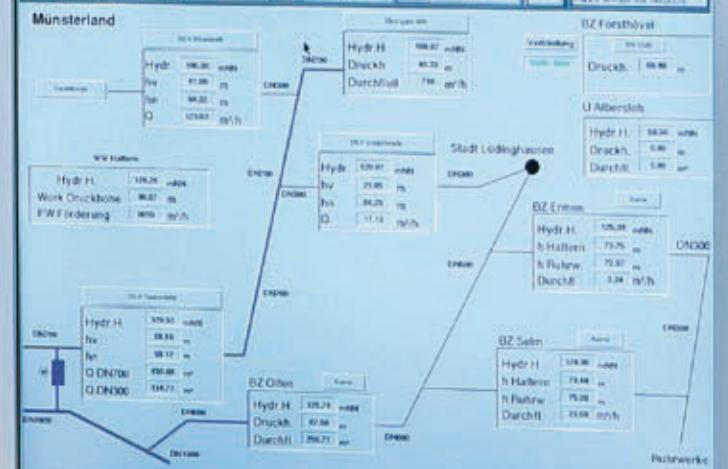



WATERFLUX – a good reason to rethink things.

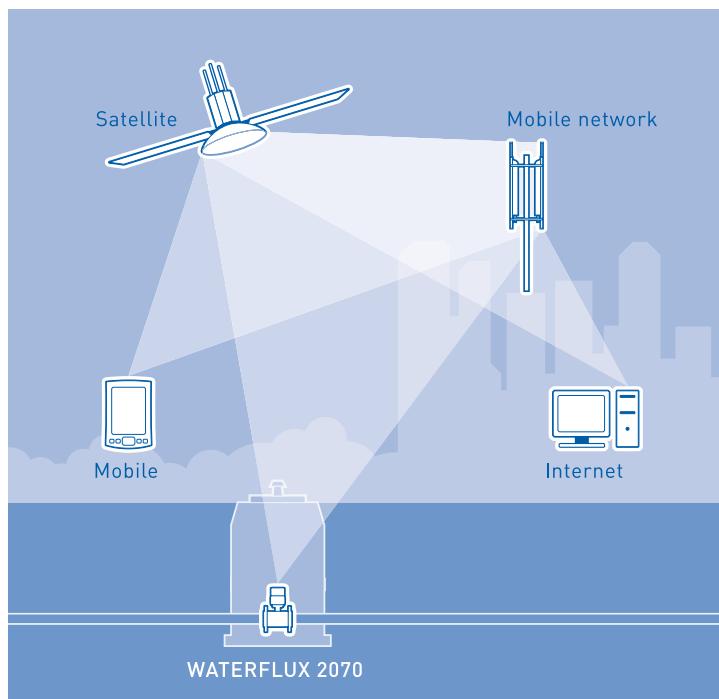


In remote points of the pressure network, there is a number of internal and external transition and control stations, where the use of a large water meter is necessary. WATERFLUX from KROHNE provides a wide range of benefits at this point in comparison to mechanical water meters.

Thus, WATERFLUX allows precise and reliable measurements for many years thanks to a monocell-lithium battery. The lifespan of the battery is at least six years in 1/5-Hz mode. In this mode, the power consumption is lower than that of a conventional electro-magnetic flowmeter by a factor of 5,000.

There is a unique pipe design, which ensures high sampling rates thanks to its free pipe cross-section – also for the long term: with the WATERFLUX, there is no loss of accuracy due to aging, sand or mineral deposits.

The forward/backward measurement is just as standard as the automatic autonomous control. Optionally, the device, which gets by completely without a filter, can be used with the GSM telemetry function. WATERFLUX is built for the business transfer as per OIML R 49 and MI-001.

The rugged, pressure-resistant containment and the excellent price-to-performance ratio round out the successful overall impression.

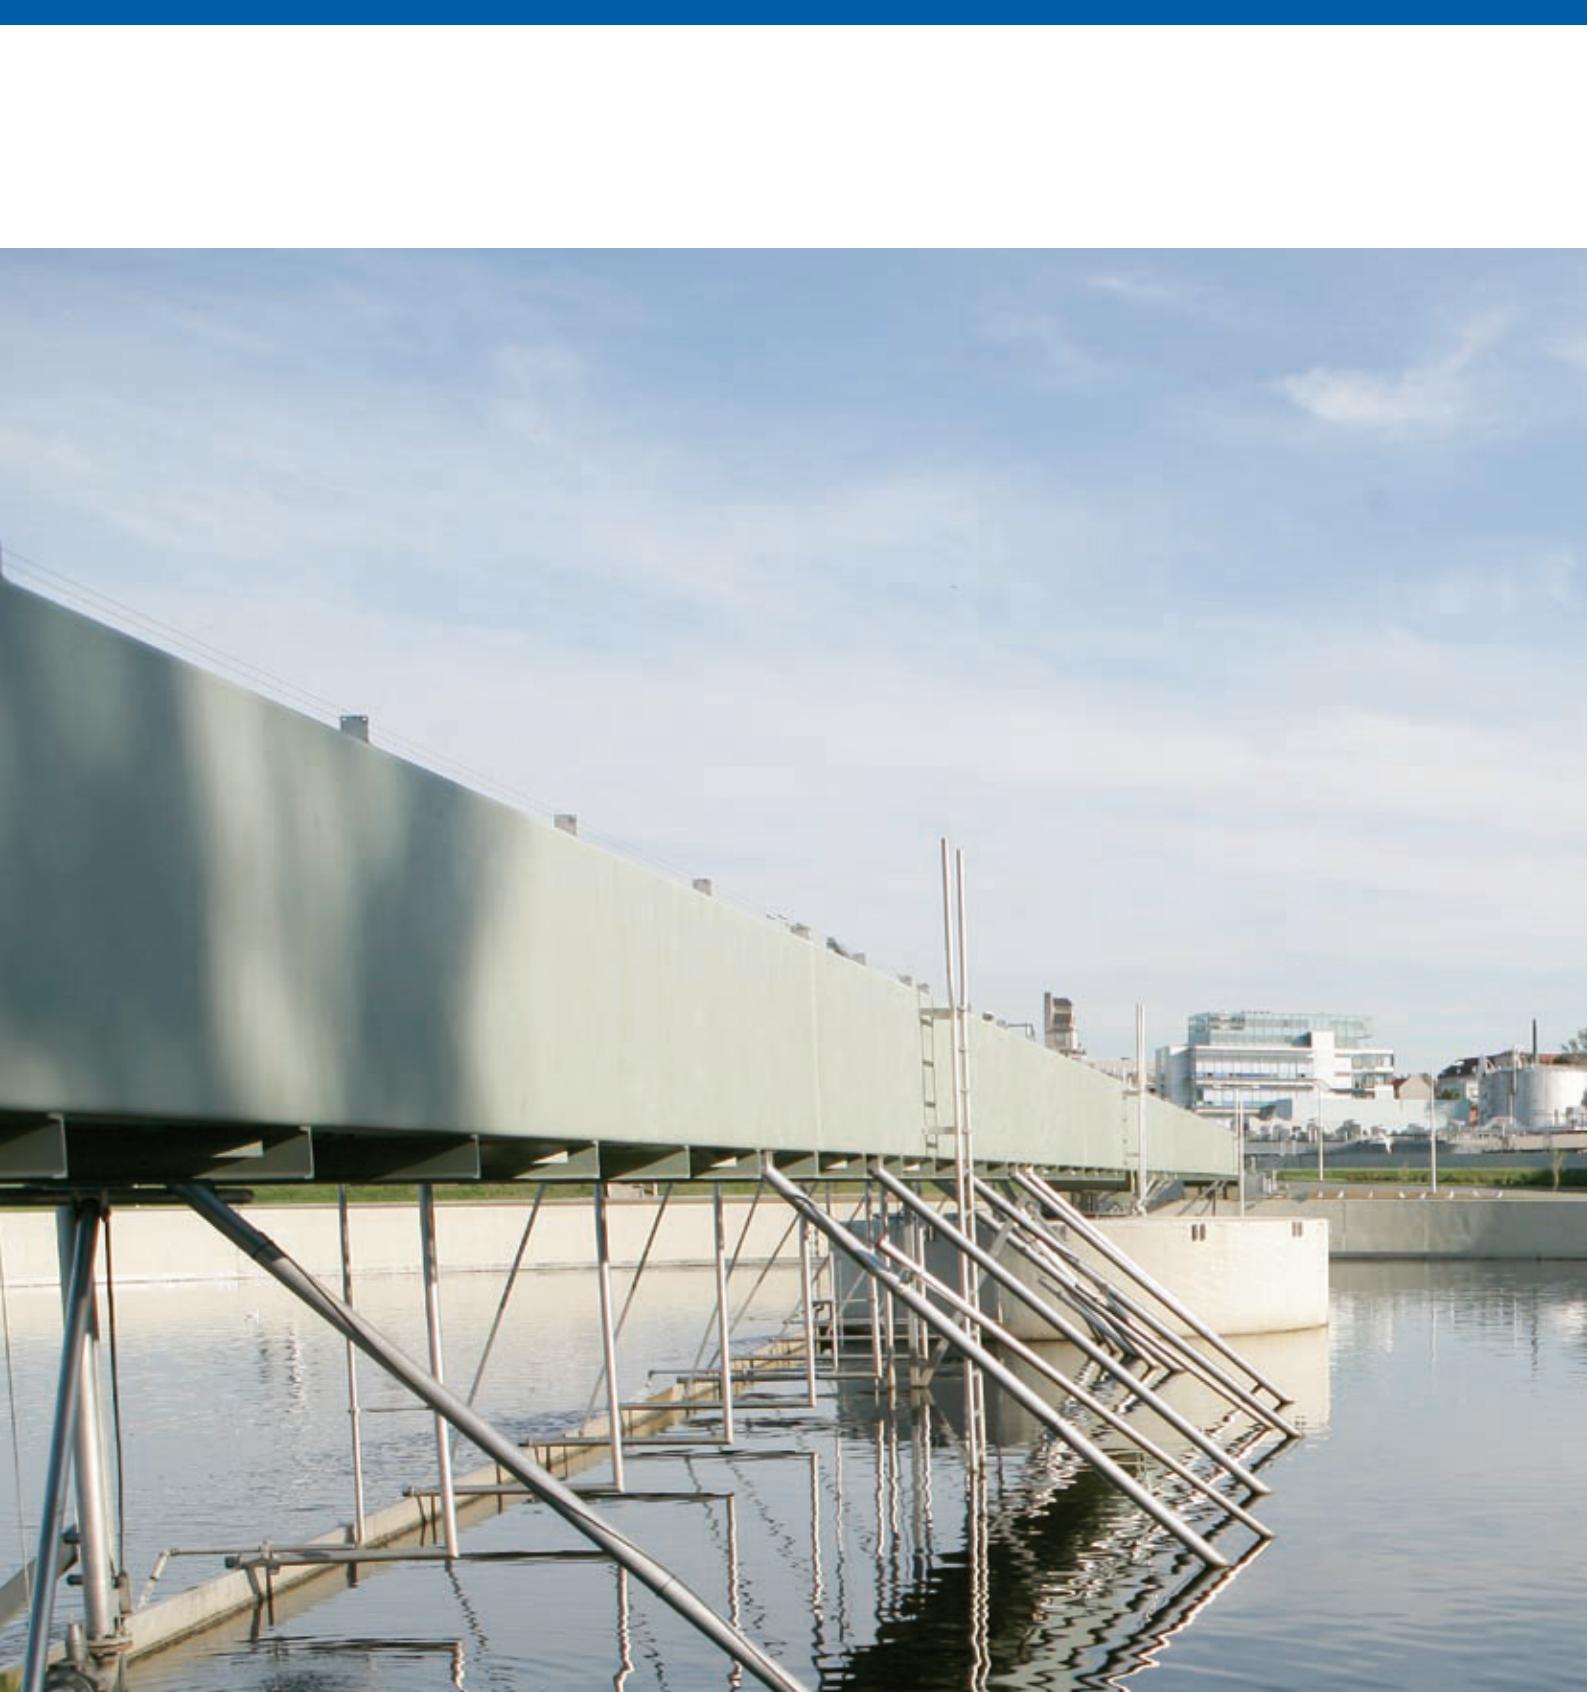

Purification plant





The Nuremberg purification plant – a matter of cleanliness for 500,000 people.

All of the wastewater that accumulates in the large city of Nuremberg is purified in two closely situated purification plants.

Purification plant 1 is by far the larger of the two purification plants and has a capacity sufficient for 1,400,000 inhabitants (EEC). The plant in West Nuremberg was commissioned in 1931. Since 1956, ongoing expansions and adjustments have been undertaken in the plant in order to increase the purification performance and to ensure that the plant is now up-to-date with the latest technology.

Purification plant 2 is the smaller of the two large purification plants in Nuremberg and is designed to serve 230,000 inhabitants. It was put into operation in 1913 as the "Nuremberg South purification plant" and became the first large purification plant in Bavaria. Since 1984, the system has been completely reconstructed.

Both purification plants are now two-stage biological purification plants (aeration/aeration) with a downstream sewage filter.

When it rains, up to four cubic meters of wastewater per second can be piped through the plant. The purified water then flows into the Pegnitz river. A total of around 130 employees ensure the smooth and safe operation of the Nuremberg purification plant.

Flow measurement for partially filled
pipelines using TIDALFLUX.



The Nuremberg 1 purification plant is a mechanical-biological purification plant, which has two-stage biological purification with nitrogen and phosphate removal and a downstream wastewater filter. There are also sludge digestion and sludge treatment systems on the site with drainage and drying.

In the mechanical purification stage, the wastewater, which flows in from the northern main collector, the old town of Nuremberg and the Pegnitz valley collector, is raised to the height of the purification plant's inlet. This takes place in purification plant 1 via a raising works that consists of three raising screw pumps. In contrast, the wastewater from the southern districts of the city (the southern relief collector and southwestern main collector) flow to the purification plant following the natural gradient.

The measurement of this flow in partially filled pipelines (DN 200 to DN 1600) is a genuine showcase field for the TIDALFLUX from KROHNE. The tried and tested electro-magnetic meter, with its patented level measuring system, ensures accurate and reliable flow measurement in partially filled pipelines.

TIDALFLUX combines two measuring principles in one device. Firstly, the average flow rate in the partially filled cross-section is determined electro-magnetically. During this, the device makes the measurements via two measuring electrodes, which are always under the surface of the water and therefore cannot be obscured, even at levels of only 10% of the inside diameter.

The level is determined using a capacitive contact-less level meter integrated in the pipe wall. The measurement takes place independently of deposits and dirt on the pipe walls and is unaffected by wave formation. Another benefit of the device is the abrasion-resistant polyurethane lining, which remains resistant even to sand and stones.

In addition to flow, total volume and level, the TIDALFLUX reliably reports when limit values are undershot or exceeded.





Measurement of untreated water using electro-magnetic flow meters.

The wastewater which is crudely cleaned by raking then flows through a sand filtering system with an automatic sand screener. The aired sand filter ensures that sand and other mineral solids settle on the bottom of the sand filter basin. At the same time, the fat in the wastewater floats to the surface.

The wastewater now flows into the pre-purification. In purification plant 1, this consists of four rectangular settling basins in which all undissolved pollutants that are heavier than water settle as pre-purification sludge on the bottom of the basin. Fats, oils and light plastics that were not completely removed in the aired sand filter float to the surface of the water and are skimmed off.

Several electro-magnetic flowmeters from KROHNE are installed in the untreated water inlet of the pre-purification system. As a rule, they have linings made of polypropylene or ebonite in order to guarantee a high degree of resistance to solids and abrasive media.

Measuring return sludge with OPTIFLUX.

As the first biological purification stage, a heavy-duty aeration system is used with oxygen gas.

Here, carbon compounds are removed from the wastewater in a total of four aeration basins operating in parallel. The heavy-duty aeration system replaces the trickling filters in Nuremberg, which previously served as the first biological purification stage.

The city of Nuremberg has decided to use the OPTIFLUX for measuring the return sludge in the heavy-duty aeration system. And for good reason. Because the reliable detection and measurement of thick sludge using electro-magnetic flow meters was anything but easy for the operators of purification plants until now: large proportions of solid bodies and gas bubbles frequently caused a noisy measuring signal. Another problem with conventional devices with a pulsed direct current field is that sludge particles and grains of sand broke the electrochemical boundary layer with disturbing regularity. The result of this: Voltage jumps. Even gas or micro-bubbles caused a similar effect and considerably affected the quality of the induced measuring signal.

OPTIFLUX is different. Because, with the IFC 300, the latest generation of electro-magnetic flowmeters offers a measured value converter for all applications: for media with a high proportion of solids (40 % and more). For media with the lowest conductivity ($> 1 \mu\text{S}/\text{cm}$). For a rapid media change. For stroke piston applications with pulsing flows and for turbulent flow.

There is already the revolutionary A/D converter electronics from the factory, which has a signal-to-noise ratio that is 40 times better than before. The result: even disturbed and noisy signals can be controlled using the OPTIFLUX.

Maximum certainty is also offered by our unique 3x100% diagnostics even for critical applications. In doing this, KROHNE is the first and only supplier to date that has supplemented the usual device diagnostics by a complete application, accuracy and linearity test (out-of-spec diagnostics). This provides the user with reliable information about instrument condition, measurement quality and possible operating faults. In this way, for example, gas bubbles are safely and reliably detected.





Methanol measurement with Coriolis flowmeters.

Light-duty aeration is the second biological purification stage. After the primarily organic carbon compounds are broken down in the heavy-duty aeration, reduced nitrogen compounds remain in the water. For the most part, these are present in the form of ammonium.

The problem: in nature, ammonium becomes nitrite and nitrate. Nitrite is poisonous, while nitrate in the waterways causes over-fertilization and consumes large amounts of oxygen as it forms. What this means: a high ammonium load can cause a die-off of fish in waterways and also allows algae to bloom.

To prevent this, this process is accelerated in the purification plant. In this way, each of the four aeration basins in the Nuremberg purification plant 1 are divided into oxygen-rich and oxygen-free zones. Ammonium is converted into nitrate (nitrification) in the oxygen-rich zones. Subsequently, the nitrate is converted to nitrogen in the unaired, oxygen-free sections of the aeration basin ("denitrification").

Methanol is dosed in during this light duty aeration phase. It serves as a source of carbon and is measured in a separate system (explosion hazard area) with a mass flowmeter from KROHNE.

The OPTIMASS 7300 is practically made for this application. This high-end device from the OPTIMASS Coriolis family is a truly multitalented device. It reliably determines mass flow rate, density, volume, temperature, mass or volume concentration and the proportion of solids with the utmost precision. The OPTIMASS 7300 masters inhomogeneous mixtures with its unique straight pipe design just as competently as nominal flows of 15 to 430,000 kg/h. This guarantees the highest degree of accuracy and reliability in the typical applications of the wastewater industry – and it does this completely independently of the respective installation situation on site.

Dosing of iron chloride and flocculating agent with electro-magnetic flow meters.

Subsequently, the wastewater from the aeration basins of the light load aeration system makes its way to nitrification and denitrification in the settling basins. Here, the activated sludge is separated from the wastewater. In the inlet of the settling basin, iron chloride or an equivalent substance is added for removing the phosphates – just as with the sand filter.

For dosing the iron chloride, more and more purification plant operators put their faith in the OPTIFLUX with PTFE special lining. The easiest commissioning, highest degree of measuring precision and maximum application certainty thanks to the unique 3x100% diagnostic packages make the OPTIFLUX a safe investment at the lowest possible life cycle costs.

The comprehensive OPTIFLUX vitality check is carried out by default for each device. It meets and exceeds even the VDI/VDE/NAMUR directive 2650. It includes an accuracy test, a check of the electrodes for corrosion, a check of the lining for damage and the conductivity check, to name only a few points.

It is no wonder that the OPTIFLUX, with so many outstanding properties, is the first choice even for dosing flocculating agents. The

highest level of precision is the top priority. After all, the dosing of flocculating agents must always be adjusted to the amount of wastewater and the degree of turbidity.

With a measuring accuracy of 0.15 % of the measuring value and a reproducibility of 0.06 %, OPTIFLUX sets the standard for the competition in this showcase field. And it does this completely unperturbed by sticky gas bubbles (vitality check). It even exceeds the accuracy of field units with a SIL-2 certificate.

Optionally, in addition to the PTFE special lining, high-value ceramics are also available for the OPTIFLUX. In this area, KROHNE can fall back on the knowledge and experience of more than two decades, thanks to its close and trusting cooperation with the Mannheim-based material and ceramics specialists at Friatec – an edge that we gladly pass on to our customers.





Flow measurement of sludge in the pre-thickener
and in the main sludge thickener
with electro-magnetic flow meters.





The sludge treatment allows biological stabilization of the sewage sludge. The central goal here is to induce controlled digestion, thereby keeping the resultant smells to an absolute minimum.

To reach this goal, the main sludge from the biological purification stages undergoes thickening in the so-called main sludge thickener and is temporarily stored in sludge storage containers before digestion.

Both in the pre-thickener and in the main sludge thickener, more and more purification plant operators put their faith in the latest generation of OPTIFLUX electro-magnetic flowmeters that were introduced with great success in 2004.

Thanks to the unique diagnostics package of the OPTIFLUX, the installation and operating status of the device are just as permanently monitored as are the critical functions and components. A real source of potential savings for the city of Nuremberg: finally, with such a high degree of certainty, not only is periodic maintenance no longer necessary, but unexpected repairs do not even occur.



Gas metering in the gas compressor
with vortex flowmeters.





Under anaerobic conditions in the digestion containers of the Nuremberg purification plant, approximately half of the organic substances in the sludge is converted to sewage gas. This corresponds to approximately one third of the solid content.

During this, the sludge is continuously circulated in the oval digestion towers at an operating temperature of approx. 37 °C. This ensures optimum temperature distribution and, at the same time, prevents sedimentation.

In the gas compressor of the Nuremberg 1 purification plant, the flow measurement is done using a vortex flowmeter from KROHNE.

With the OPTISWIRL 4070 C, KROHNE offers the only vortex flowmeter with integrated pressure and temperature compensation in the 2-wire design. The device reliably determines ope-

rating flow, flow volume at normal conditions and mass flow of gases and vapors. Even when pressures and temperatures are fluctuating, the compact unit provides stable and reliable measurement results (thanks to ISP – Intelligent Signal Processing). The temperature compensation for saturated steam is already standard on the OPTISWIRL 4070 C.

The following steps serve to separate the water from the sewage sludge. First, the selected sludge is thickened. The sewage sludge is processed further in a centrifuge and in two other drying steps (thin layer dryer and sheet dryer). This allows a dry substance content of approx. 90 % to be achieved. For safety reasons (risk of spontaneous combustion), the dried sewage sludge undergoes a pelleting process before it is put into interim storage in dry sludge silos until it is transport out.

Communication at KROHNE: Open for the future.



The industrial automation in the maximum system availability is indispensable for the water industry and its private and commercial customers. In order to be able to meet this key criterion 365 days a year, 24-hours a day, KROHNE invested its knowledge and decades of experience, not only in innovative products like the OPTIFLUX with its unique 3 x 100% diagnostics, but also in positioning itself as a visionary in important communication and integration technology.

Thus, system concepts in which the products of the most diverse manufacturers harmonious work together are becoming a reality via open, standard interfaces such as HART, PROFIBUS and FOUNDATION FIELDBUS.

KROHNE has been actively following this development for years. Whether you are talking about electro-magnetic, ultrasonic, variable area flowmeters, mass, vortex or level: KROHNE field units are open for the future. They communicate reliably with controllers, control systems and PCs and can also be used for the most diverse control and regulating tasks.

Integration is a top priority at KROHNE

KROHNE field units are capable of much more however. They meet all of the prerequisites for being integrated in plant asset management systems. And they allow the supplying of serious integration technologies such as FDT/DTM.

What is special about FDT/DTM: for the first time, bus-independent integration of the field technology into the plant asset management system is possible – no doubt a milestone for industrial communication, of which KROHNE had and has a considerable share, as a long-standing member of PACTware and the FDT group.

So it is no wonder that, since the beginning of 2003, we have made DTM's available in the FDT 1.2 versions for a number of field units with HART and/or PROFIBUS interfaces: OPTIMASS, electro-magnetic flowmeters (two and four wire), level radar and reflex radar devices as well as H250 ESK and M10 variable area flowmeters.

PACTware and all KROHNE DTM's are available free of charge and fully functional without a license. They are included on a CD in each delivery of the device and are available in the KROHNE download center.

Calibration from KROHNE: Certainty that you can count on.

The true quality of a flowmeter can be seen under adverse conditions: for example, when pressures and vacuums are fluctuating heavily during the measurement of inhomogeneous measured substances or media with a high proportion of solids.

Therefore, starting with the calibration, we at KROHNE do everything to ensure that our flowmeters perform impressively, with the highest degree of accuracy, reliability and reproducibility, even under such conditions.

Thus, for example, each KROHNE flowmeter is wet-calibrated in a direct comparison of volumes, which is by far the most accurate calibration method. The calibration is carried out both for electro-magnetic and ultrasonic flowmeters on the world's largest calibration system at KROHNE-Altimeter in Dordrecht, in the Netherlands.

It is no wonder that the accuracy of the KROHNE calibration stations is generally 10x better than that of the flowmeters to be tested. For our customers, this not only means a maximum degree of certainty, but also guarantees the accuracy information of all flowmeters under reference conditions.

Another benefit for our customers: KROHNE supplies the largest NKO-certified flowmeters worldwide. This guarantees the highest degree of measuring accuracy – even under difficult operating conditions.



KROHNE Germany

KROHNE Messtechnik GmbH & Co. KG
Ludwig-Krohne-Str. 5
D-47058 Duisburg
Tel: +49 (0) 203 301 0
Fax: +49 (0) 203 301 389
info@krohne.de

Sales, north

KROHNE Messtechnik GmbH & Co. KG
Bremer Str. 133
21073 Hamburg
Tel: +49 (0)40 767 3340
Fax: +49 (0) 40 767 33412
nord@krohne.de
postal code: 10000 - 29999,
49000 - 49999

Sales, west/centre

KROHNE Messtechnik GmbH & Co. KG
Ludwig-Krohne-Str. 5
47058 Duisburg
Tel.: +49 (0)203 301 416
Fax: +49 (0)203 301 10416
west@krohne.de
postal code: 30000 - 34999,
37000 - 48000, 50000 - 53999,
57000 - 59999, 98000 - 99999

Sales, south

KROHNE Messtechnik GmbH & Co. KG
Landsberger Str. 392
81241 Munich
Tel.: +49 (0)89 121 5620
Fax: +49 (0)89 129 6190
sued@krohne.de
postal code: 0 - 9999, 80000 - 89999,
90000 - 97999

Sales, southwest

KROHNE Messtechnik GmbH & Co. KG
Rüdesheimer Str. 40
65239 Hochheim/Main
Tel.: +49 (0)6146 827 30
Fax: +49 (0)6146 827 312
rhein-main@krohne.de
postal code: 35000 - 36999,
54000 - 56999, 60000 - 79999

Catalogue for measuring and control equipment

TABLAR Messtechnik GmbH
Ludwig-Krohne-Straße 5
47058 Duisburg
Tel.: +49 (0)2 03 305 880
Tel: +49 (0)2 03 305 8888
kontakt@tablar.de www.tablar.de

KROHNE Sales companies

Australia

KROHNE Australia Pty Ltd
Quantum Business Park 10/287
Victoria Rd Rydalmere NSW 2116
Tel.: +61 2 8846 1700
Fax: +61 2 8846 1755
krohne@krohne.com.au

Belgium

KROHNE Belgium N.V.
Brusselstraat 320
B-1702 Groot Bijgaarden
Tel.: +32 (0)2 4 66 00 10
Fax: +32 (0)2 4 66 08 00
krohne@krohne.be

Brazil

KROHNE Conaut Controles
Automaticos Ltda.
Estrada Louis Pasteur, 230
C.P. 56 06835 - 080 EMBU - SP
Tel.: +55 (0)11-4785-2700
Fax: +55 (0) 11 4785 2768
conaut@conaut.com.br

China

KROHNE Measurement Instruments
(Shanghai) Co. Ltd., (KMIC)
Room 1501
1033 Zhaojiabang Road
Shanghai 200030
Tel: +86 21 6487 9611
Fax: +86 21 6488 7110
info@krohne-asia.com

France

KROHNE S.A.S.
Les Ors BP 98
F-26103 ROMANS Cedex
Tel: +33 (0)4 75 05 44 00
Fax: +33 (0)4 75 05 00 48
info@krohne.fr

Great Britain

KROHNE Ltd.
Rutherford Drive
Park Farm Industrial Estate
Wellingborough
Northants NN8 6AE
Tel: +44 (0)19 33 408 500
Fax: +44 (0)19 33 408 501
info@krohne.co.uk

CIS

Kanex KROHNE Engineering AG
Business-Centre Planeta
Office 404 ul.
Marksistskaya 3
109147 Moscow/Russia
Tel.: +7 (0)95 911 7165
Fax: +7 (0)95 742 8873
krohne@dol.ru

India

KROHNE Marshall Ltd.
A-34/35, M.I.D.C. Industrial Area,
H-Block
Pimpri Poona 411018
Tel.: +91 (0)20 744 2020
Fax: +91 (0)20 744 2020
pcu@vsnl.net

Iran

KROHNE Liaison Office
North Sohrevardi Ave.
26, Sarmad St., Apt. #9
Tehran 15539
Tel.: +9821 8874 5973
Fax: +9821 8850 1268
krohne@krohneiran.com

Italy

KROHNE Italia Srl.
Via V. Monti 75
I-20145 Milan
Tel: +39 02 4300 661
Fax: +39 02 4300 6666
info@krohne.it

Korea

KROHNE Korea
Room 508 Miwon Bldg 43
Yido-Dong Youngdeungpo-Ku
Seoul, Korea
Tel.: 00-82-2-782-1900
Fax: 00-82-2-780-1749
krohnekorea@krohnekorea.com

Netherlands

KROHNE Nederland B.V.
Kerkeplaat 14
NL-3313 LC Dordrecht
Tel.: +31 (0)78 630 6200
Fax: +31 (0)78 630 6405
Service Direct: +31 (0)78 630 6222
info@krohne.nl

Norway

KROHNE Norway A.S.
Ekholteveien 114
NO-1521 Moss
Tel.: +47 (0)69 264 860
Fax: +47 (0)69 267 333
postmaster@krohne.no

Austria

KROHNE Austria GmbH.
Modecenterstraße 14
A-1030 Vienna
Tel: +43 (0)1/203 45 32
Tel: +43 (0)1/203 47 78
info@krohne.at

Poland

KROHNE Endra Sp. z.o.o.
ul. Stary Rynek Oliwski 8a
80-324 Gdańsk
Tel.: +48 (0)58 5209211
Fax: +48 (0)58 520912
wendraszka@krohne.pl

Republic of South Africa

KROHNE Pty. Ltd.
Bushbuck Close
Corporate Park South
Midrand, Gauteng
P.O. Box 2069
Midrand, 1685
Tel.: +27 (0)11 314 1391
Fax: +27 (0)11 314 1681
midrand@krohne.co.za

Switzerland

KROHNE AG
Uferstr. 90
CH-4019 Basel
Tel.: +41 (0)61 638 30 30
Fax: +41 (0)61 638 30 40
info@krohne.ch

Singapore

Tokyo Keiso - KROHNE (Singapore)
Pte. Ltd.
14, International Business Park,
Jurong East
Chiyoda Building, #01-01/02
Singapore 609922
Tel: (65) 6567 4548
Fax: (65) 6567 9874
tks@tokyokeiso-krohne.com.sg

Spain

I. I. KROHNE IBERIA, S.r.l.
Polígono Industrial Nilo
Calle Brasil, nº. 5
28806 Alcalá de Henares
Madrid
Tel.: +34 (0)91 883 2152
Fax: +34 (0)91 883 4854
krohne@krohne.es

Czech Republic

KROHNE CZ, spol. s.r.o.
Sobišická 156
63800 Brno
Tel.: +420 (0)545.242 627
Fax: +420 (0)545 220 093
brno@krohne.cz

Turkey

KROHNE ENELSAN
Gizden Sokak 4/3
80280 Gayrettepe Istanbul
Tel.: +90 212 2670813
Fax: +90 212 2722442
enelsan@enelsan.com

USA

KROHNE, Inc.
7 Dearborn Road
Peabody, MA 01960
Tel.: +1 (800) FLOWING
Tel.: +1 (978) 535 6060 (in MA)
info@krohne.com

KROHNE Agencies

Egypt
Algeria
Argentina
Bulgaria
Chile
Denmark
Ecuador
Ivory Coast
Finland
Gabon
Ghana
Greece
Hong Kong
Indonesia
Iran
Ireland
Iceland
Israel
Japan
Jordan
Yugoslavia
Cameroon
Canada
Columbia
Croatia
Kuwait
Latvia
Lebanon
Libya
Lithuania
Madagascar
Malaysia
Mauritius
Mexico
Morocco
New Zealand
New Caledonia
Oman
Pakistan
Peru
Philippines
Portugal
Qatar
Romania
Saudi Arabia
Sweden
Senegal
Slovakia
Slovenia
Syria
Taiwan
Tanzania
Thailand
Tunisia
Hungary
Uruguay
Venezuela
Vietnam

