


Czech utility company uses FLIR GF306 optical gas imaging to check for SF6 leaks

Sulfur Hexafluoride (SF6) is used as an insulating gas in the distribution of high voltage electrical power. It allows substation equipment to be more compact. SF6 is also a very potent greenhouse gas, however. Leaks in the equipment therefore not only endanger the continuity of power distribution, the leaks also have consequences for the environment. To ensure the continuity of power distribution and limit the impact on the environment, utility companies can use an optical gas imaging camera to detect SF6 gas leaks. One utility company that has embraced the use of optical gas imaging technology is the Prague, Czech Republic, based ČEPS a.s.

ČEPS a.s. is the sole Czech transmission system operator and holds an exclusive license to that effect granted by the Czech Energy Regulatory Office under the Energy Act. The company is responsible for the maintenance and upgrading of 39 substations comprising 68 transformers, which allow electricity to be supplied from the transmission system to the distribution network. Almost all of the circuit breakers, current transformers, voltage transformers and gas insulated substations in the distribution network use SF6 as insulator. This dielectric gas is very effective as insulator as it helps to prevent or rapidly quench electric discharges, making it the most commonly used insulating gas in high voltage equipment across the world.

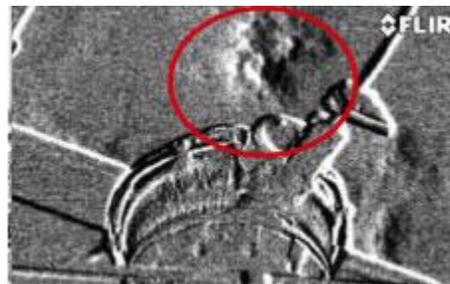

Gas leaks become easily visible thanks to the FLIR GF306


“Detecting SF6 leaks in an early stage helps to avoid breakdowns and ensures continuity in the power distribution”, explains Milan Sedláček, head of the High Voltage Maintenance Department at ČEPS a.s.

FLIR GF306

“We tested the FLIR GF306 optical gas imaging camera on a current transformer that was leaking SF6 and we immediately realized its potential”, says Sedláček, “We had tried unsuccessfully to detect the leak with other means, but with the FLIR GF306 optical gas imaging camera we managed to find out where the problem was located. Following this surprisingly successful demonstration we have purchased the camera and we have not regretted that decision. It has proven to be very effective even within a few months of use.”

Gas sniffers versus FLIR GF306

As SF₆ is colorless, odorless and not flammable, it is nearly impossible to detect with the naked eye. A commonly used tool to detect this invisible gas is the so-called ‘sniffer’, a device which measures the concentration of a certain gas in one single location and generates a concentration reading in parts per million (ppm). Although these tools are very useful, their use is limited, according to Sedláček. “A sniffer only detects gas leakage in one point. This means that it is very easy to miss a leak. The current transformer we used to test the FLIR GF306 optical gas imaging camera is a good example. We knew it was leaking, as we needed to top it up with SF₆ every six or eight months or so, but we could not locate the leak with sniffers. With the FLIR GF306 optical imaging camera we were able to locate the leak very swiftly.”

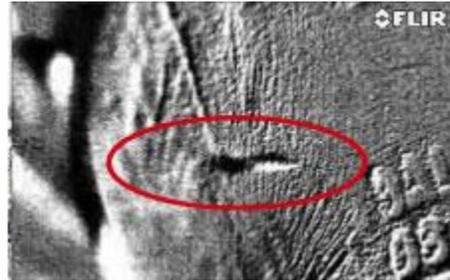

With the FLIR GF306 insulators containing SF₆ gas can be easily detected from a safe distance.

SF₆ leaks in electrical equipment may occur due to installation errors, disturbance during planned maintenance or failure of the sealing parts due to age. The most common leak paths found on electrical distribution equipment are flanges, bushings, bursting discs and valve stems. “As long as leaks are confined to the locations where you expect them sniffers can be very useful, but leaks often occur in unexpected locations”, explains Sedláček. “In the case of the current transformer we used to test the FLIR GF306 optical gas imaging camera the leakage occurred in the material of the current transformer head, not in a location where two parts joined, where you would suspect a leak. We would never have been able to find the location of the leak with a sniffer. Sniffers just give you a one point measurement, while the optical gas imaging camera gives you an overview of the entire current transformer or other piece of equipment you are inspecting.”

The main advantage of optical gas imaging when compared with other methods is the detection range, according to Sedláček. “With a sniffer you have to be within just a few millimeters of the leak location to detect the SF₆ leak, but we found that the FLIR GF306 optical gas imaging camera can detect small leaks from six meters, so it can be used safely while the equipment is under charge. This means that no downtime is required for the inspection, which is a huge advantage for us.” Another advantage is the increased inspection speed. “Using sniffers to find gas leaks is a time consuming exercise. You have to physically hold the sensor next to each likely leak location. With the FLIR GF306 optical gas imaging camera you can scan an entire piece of equipment in one go.”

“The dimensions and weight of the FLIR GF306 optical gas imaging camera are similar to a regular video camera, making it easy to use in the field”, says Sedláček.

High sensitivity mode

One of the camera's special features that Sedláček uses often is the High Sensitivity Mode (HSM), a special feature that is included in all GF-Series optical gas imaging cameras. It is an image subtraction video processing technique that effectively enhances the thermal sensitivity of the camera. The HSM feature subtracts a percentage of individual pixel signals from frames in the video stream from the subsequent frames, thus enhancing the differences between frames, which make leaks stand out more clearly in the resulting images.

FLIR GF306: an excellent investment

According to Sedláček the choice to invest in a FLIR GF306 optical gas imaging camera was a good one. "It allows us to find and therefore fix SF₆ leaks swiftly, which saves money that would otherwise be spent on topping up with SF₆, and does so without requiring downtime while we find the leaks.

FLIR GF306

The FLIR GF306 optical gas imaging camera is lightweight, compact and ergonomically designed to prevent back and arm strain. With its rotating handle, direct access buttons and tiltable viewfinder and LCD screen the FLIR GF306 optical gas imaging camera is designed from the end-user's perspective.

The FLIR GF306 optical gas imaging camera has a detector response of 10-11 μm which is further spectrally adapted to approximately 10.5 μm by use of a cooled filter. This makes this particular model of camera most responsive to Sulphur Hexafluoride (SF₆).